





Fencing Project 2021- Mason County PUD 1

Job Site: 21971 N. Highway 101, Shelton, Washington 98584

Questions from Pre- Bid Walkthrough

1. What is the standard for the fencing?

a. The PUD asks that State DOT standards are used in the fencing and that the fencing matches the fencing that is currently in place. The fence itself should be 6 feet tall, with 1 foot of barbwire (3 strands) on top the 6-foot fence. The poles used are 3 inches in diameter. The poles should be placed a minimum of 30 inches below ground, please use footing diagram below for reference. All concrete post bases should be 10" (in) minimum diameter.

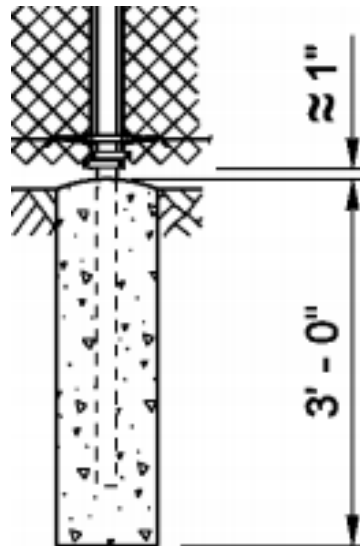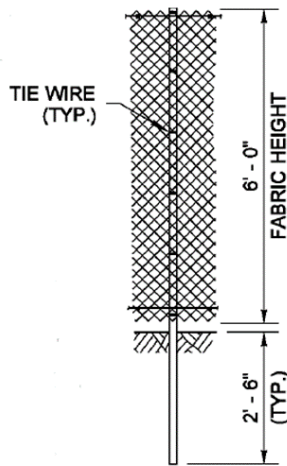



PUBLIC UTILITY DISTRICT NO. 1
OF MASON COUNTY
N. 21971 Hwy. 101
Shelton, Washington 98584

BOARD OF COMMISSIONERS

MIKE SHEETZ, Commissioner
JACK JANDA, Commissioner
RON GOLD, Commissioner

- 2. Are the gates the same height as the fence? Swinging or automatic gates?**
 - a. The gates need to be the same height as the fencing, swinging fencing, and not automatic.
- 3. Are the bids in a lump sum?**
 - a. Yes, bids will be in a lump sum.
- 4. Prevailing wage?**
 - a. Yes, state prevailing wage.
- 5. Will markers be set for turn points?**
 - a. Yes, we will have markers set before project start date.
- 6. Who is responsible for permitting?**
 - a. The PUD will do all necessary permitting.
- 7. Will the fence match existing?**
 - a. Yes.
- 8. Will the PUD take care of locates?**
 - a. Yes, the PUD will have locates called in before the start of the project.
- 9. What is the timeline?**
 - a. The PUD is flexible on timeline, although would like to see the fence constructed in the next few months. We ask that the Contractors include an estimated timeline in their bid.
- 10. Fencing stats, or no slats?**
 - a. No slats.
- 11. How clear will fencing path be?**
 - a. The fencing path will be cleared completely and graded as needed. The PUD has multiple excavators and operators that will cater to specifics if needed.
- 12. What are working hours?**
 - a. Generally, up to the contractors. The PUD operates from 8:00 a.m. to 4:30 p.m., but access to the campus will be open to the contractor as they will be issued a key to the gates that is checked out for the duration of the project.
- 13. Is the ground vault (Located behind the shop) included in the fencing boundary?**
 - a. Yes, the fence will parallel utilities on the south-west portion of the campus.
- 14. Are there as-builts for the current fence?**
 - a. Unfortunately, no.
- 15. Is the Contractor anchoring the fence to the warehouse?**
 - a. No, although a temporary attachment that meets the building is necessary. This is due to future plans to remove the building.